

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000812

International filing date: 03 March 2005 (03.03.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 04 05108.2  
Filing date: 06 March 2004 (06.03.2004)

Date of receipt at the International Bureau: 12 May 2005 (12.05.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse





INVESTOR IN PEOPLE


The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

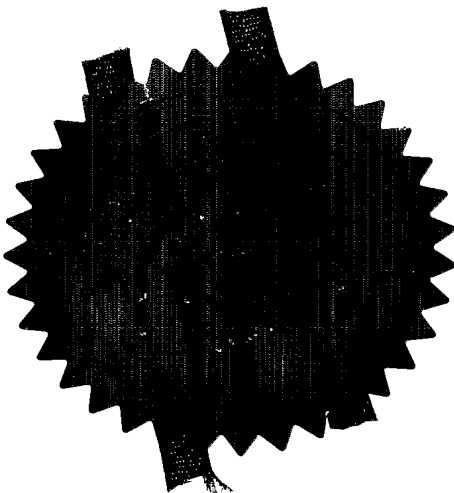

Signed

Dated 30 March 2005










# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference 15819 MdH

2. Patent application number  
(The Patent Office will fill in this part)

0405108.2

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Accentus plc  
329 Harwell  
Didcot  
Oxfordshire OX11 0QJ

Patents ADP number (if you know it)

8132243003

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention Removal of sodium oxalate from a Bayer liquor

5. Name of your agent (if you have one)

Peter Turquand MANSFIELD

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Accentus plc  
Patents Dept  
329 Harwell  
Didcot  
Oxfordshire OX11 0QJ

Patents ADP number (if you know it)

8132243001

6. If you are declaring priority from one or more earlier patent applications, give the country

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))



9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description	9
Claim(s)	3
Abstract	1
Drawing(s)	2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

**1 P.T. MANSFIELD (on behalf of Accentus plc  
by virtue of a Power of Attorney dated 18th February 2003)**

I/We request the grant of a patent on the basis of this application.

Signature

Date 5.3.04

12. Name and daytime telephone number of person to contact in the United Kingdom

Frances Esplin - 0870 190 2911

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.



Removal of Sodium Oxalate from a Bayer Liquor

This invention relates to a method and apparatus for removing sodium oxalate from a Bayer liquor.

5

The Bayer process is a widely used process for obtaining pure alumina from bauxite ore. It involves treating the ore with hot sodium hydroxide solution at say 255°C, so alumina dissolves to form sodium aluminate, leaving other minerals from the ore in the form of red mud. The saturated sodium aluminate solution is cooled, and seeded with aluminium trihydroxide crystals. The aluminium in solution precipitates as the trihydroxide, and can then be calcined at say 1050°C to form pure alumina. The remaining solution, which may be referred to as Bayer liquor, can be recycled to treat fresh ore, after addition of any necessary sodium hydroxide to ensure it is concentrated enough.

20 There is however a risk that organic contaminants, and in particular sodium oxalate, will build up in the recycled liquor, and will reach a concentration at which sodium oxalate will co-precipitate with the aluminium trihydroxide. This is detrimental to the quality of the alumina, it causes the trihydroxide to form very small crystals, so leading to a wide variation in particle size, and it also leads to embrittlement of the precipitated particles. The oxalate ions may originate from the ore, or may be formed by caustic degradation of other organic compounds from the ore. It is therefore necessary to remove sodium oxalate from the Bayer liquor before it reaches this concentration.

35 For example at least a part of the Bayer liquor may be cooled, so sodium oxalate precipitates out. US 3 899 571 (=EP 0 013 407) describes a way of triggering



precipitation in such a supersaturated solution, by adding recycled crystals of sodium oxalate to act as initiator; the resulting crystals can be separated by filtration, and some can be set aside as the next  
5 initiator. However, in practice it is found that the surfaces of the crystals become poisoned by other organic materials present in the liquor, and become inactive as crystal growth initiators.

10 According to the present invention there is provided a method for removing sodium oxalate from a Bayer liquor, the method comprising removing a stream of the liquor, treating it to be supersaturated with sodium oxalate, and  
15 then subjecting it to ultrasonic irradiation, and removing resultant crystals.

Preferably the stream of the liquor is subjected to ultrasonic irradiation for a time no more than 30 seconds, more preferably no more than 10 seconds, for  
20 example 2 seconds or 3 seconds. This may be achieved by causing the stream to flow through a duct, and continuously subjecting the contents of the duct to ultrasonic irradiation. Preferably the ultrasound is applied using a multiplicity of ultrasonic transducers  
25 attached to a wall of the duct in an array of separate transducers extending both circumferentially and longitudinally, each transducer being connected to a signal generator so that the transducer radiates no more than  $3 \text{ W/cm}^2$ , the transducers being sufficiently close  
30 together and the number of transducers being sufficiently high that the power dissipation within the vessel is between 25 and 150 W/litre. Preferably the duct is of width at least 0.10 m, that is to say if the duct is cylindrical it is of diameter at least 0.10 m. The values  
35 of power given here are those of the electrical power delivered to the transducers, as this is relatively easy



~~to determine. Such an irradiation vessel is described in~~  
WO 00/35579. With such a vessel there is little or no  
cavitation at the surface of the wall, so that there is  
no erosion of the wall and consequently no formation of  
5 small particles of metal. Surprisingly, despite the  
presence of the organic materials in the liquor which  
tend to poison the surfaces of the crystals as they grow,  
satisfactory crystallisation of the sodium oxalate is  
achieved.

10

Preferably the ultrasound is supplied by a  
multiplicity of transducers coupled to the wall of a pipe  
carrying the supersaturated solution, the liquor flowing  
at such a rate that the solution is insonated for less  
15 than 2 s.

The initial treatment to supersaturate the oxalate  
in solution may for example involve evaporation and  
cooling, or just cooling, before the liquor is subjected  
20 to ultrasound. This ensures that any materials that are  
readily crystallised have already formed crystals.

After the ultrasonic treatment, the resulting  
crystalline material is typically a mixture of sodium  
25 oxalate with other organic or inorganic sodium salts.

The treatment to make the solution supersaturated  
may for example involve cooling to about 70°C, although  
the requisite temperature depends upon the initial  
30 concentration of the solution being cooled. In another  
example the solution is cooled to about 40°C before being  
subjected to insonation. Even better removal of these  
products can be achieved by further cooling the solution  
after the insonation. In one embodiment the stream of  
35 liquor subjected to ultrasound is only part of the liquor  
subjected to crystallisation, so that the liquor



subjected to ultrasound can then be mixed with a supersaturated solution, so that crystal growth occurs. The resulting crystals are then easier to separate from remaining liquid.

5

The invention also provides an apparatus for performing this method.

The invention will now be further and more particularly described by way of example only and with reference to the accompanying drawings, in which:

Figure 1 shows a flow diagram of plant for removing sodium oxalate from spent Bayer liquor; and

15

Figure 2 shows a flow diagram of a modification to the plant of figure 1.

Referring to figure 1, spent Bayer liquor 10 is evaporated and cooled, through successive treatment steps 12, 14 (for example ending up at 70°C), so that the resulting liquor 16 is significantly more concentrated. The sodium oxalate is supersaturated, but tends not to come out of solution readily, probably because of the other organic material in solution. The liquor 16 is then supplied via a duct 18 to one or more successive hold-up tanks (two such tanks 20 and 22 are shown in this example) each containing a stirring mechanism 25, in which, as discussed below, crystals form. Each tank 20 and 22 may be at the same temperature as the inflowing liquor 16, or alternatively successive tanks may be at lower temperatures. Finally the mixture of caustic solution and crystals is supplied to a filtration unit 26 such as a belt filter, and the filtrate 27 (which primarily consists of caustic soda and sodium aluminate solution) can be returned to the process stream used for



dissolving bauxite. The filter cake 28 is primarily sodium oxalate, mixed with other organic and inorganic sodium salts, and can then be removed for disposal or further treatment.

5

Before it reaches the first hold-up tank 20, part of the liquor 16 is diverted into an ultrasonic treatment loop 30. Within the loop 30 is an ultrasonic treatment module 32 followed by a hold-up tank 34, and the loop 30 then feeds into the first hold-up tank 20. The loop 30 is shown diagrammatically, and the flow paths may typically be of nominally six inch (150 mm) diameter pipe, and the ultrasonic treatment module 32 comprises a stainless-steel duct 36 of the same internal diameter.

15

To the outside of the duct wall are attached ten transducer modules 38 in a regular array. Each transducer module 38 comprises a 50 W piezoelectric transducer 40 which resonates at 20 kHz, attached to a conically flared aluminium coupling block 42 by which it is connected to the wall, the wider end of each block 42 being of diameter 63 mm. The transducer modules 38 are arranged in two circumferential rings each of five modules 38, the centres of the coupling blocks being about 105 mm apart around the circumference, and about 114 mm apart in the longitudinal direction. A signal generator 44 drives all the transducers 40. The transducer modules 38 are enclosed by a protective casing 46.

30

With this irradiator 10 the power intensity is only about  $1.6 \text{ W/cm}^2$ , and is such that cavitation does not occur at the surface of the wall, so erosion of the duct 36 does not occur. Nevertheless the power density is sufficient to ensure nucleation in a saturated solution. The volume of liquid which is subjected to insonation is



about 5 l, so the power density is about 100 W/litre.

(The power density can be adjusted by adjusting the power supplied to the transducers 40, but is usually between 40 and 100 W/litre.)

5

If no liquor 16 is passed around the ultrasonic treatment loop 30, the concentration of sodium oxalate has been found to be reduced by this treatment to 2.1-2.4 g/litre. In contrast, with insonation at 70°C, the  
10 concentration was reduced to 1.77-1.87 g/litre; and where the temperature is reduced to 55°C after insonation, the concentration was reduced to only 1.42 g/litre in the treatment loop 30. The exact results will depend upon the proportion of the liquor 16 which is passed through  
15 the ultrasonic treatment loop 30. Nucleation occurs in the liquor flowing through the ultrasonic treatment module 32, and the nuclei grow in the hold-up tank 34, so that the liquor emerging from the treatment loop 30 into the hold-up tank 20 already contains small sodium oxalate  
20 crystals. The liquor 16 flowing into the first hold-up tank 20 from the duct 18 is supersaturated, and so the crystals grow larger. Thus the first hold-up tank 20 initiates the crystallisation process, while the second hold-up tank 22 provides for crystal growth. The liquor  
25 may be held for a prolonged time (for example one or two hours) in each tank 20 and 22 to allow crystals to grow from any crystal nuclei. It will be appreciated that larger crystals of sodium oxalate are easier to separate from the filtrate in the filtration unit 26.

30

The flow rate through the ultrasonic treatment loop 30, and so through the duct 36, should be such that the liquor is insonated for a period between 1 s and 10 s, for example about 3 s. A larger quantity of liquor can  
35 be treated (per unit time), by using a longer irradiation duct of the same diameter, with more circumferential



5 rings of five modules 38 each, the rings being spaced apart by 114 mm centre to centre in the longitudinal direction, as described in relation to the drawing. For example, using a duct with twenty such circumferential rings of five modules 38, and so with an insonation volume about ten times that of the duct shown in the drawing, the same insonation time can be achieved with a ten times increase in flow rate.

10 Preferably the proportion of the liquor 16 which is passed around the ultrasonic treatment loop 30 is at least 1%, more preferably at least 10%, and may indeed be 50% or more. On a large-scale plant it is preferable to treat about 40%-60% of the supersaturated liquor 16.

15 Although it would be possible to treat all the liquor 16 by passage through the ultrasonic treatment loop 30, this is not essential. Combining a supersaturated liquor with a liquor containing crystals generated in the ultrasonic treatment loop 30, in hold-up tank 20, leads to the  
20 consequence that the entire stream of liquor 16 is exposed to the newly-formed crystals, and so the crystallisation process is very effective, and ensures that larger crystals are formed.

25 It will be appreciated that the plant shown in figure 1 may be modified in various ways. For example, in the ultrasonic treatment loop 30, the hold-up tank 34 might be omitted, and might be replaced by a heat exchanger to reduce the temperature of the liquor. And  
30 the number of hold-up tanks 20-22 may be different from that shown. For example, there might be four such successive hold-up tanks, with insonated liquor being introduced into the third hold-up tank (for example from the hold-up tank 34), so further nucleation is caused;  
35 and the fourth hold-up tank being provided for further



~~crystal growth resulting from the nucleation initiated in~~  
the third hold-up tank 22.

Referring to figure 2, a flow diagram is shown of a  
5 modification to the plant shown in figure 1; those  
features which are the same are referred to by the same  
reference numerals. The spent Bayer liquor 10 is  
evaporated and cooled, through successive treatment steps  
12, 14 (for example ending up at 70°C), so that the  
10 resulting liquor 16 is significantly more concentrated.  
The liquor 16, in which sodium oxalate is supersaturated,  
is then passed through an ultrasonic treatment module 52  
(substantially the same as the module 32, but modified in  
order to treat larger quantities of liquid, as discussed  
15 above), and then through a heat exchanger 54 to lower its  
temperature (e.g. to about 55°C). The liquor 16 is then  
supplied to four successive hold-up tanks 20-23 each  
containing a stirring mechanism 25, in which the liquor  
is held for a prolonged time (for example 45 minutes in  
20 each), to allow crystals to grow from any crystal nuclei  
formed as a result of the cooling and the passage through  
the ultrasonic treatment module 52. The tanks are at  
successively lower temperatures. Finally the mixture of  
caustic solution and crystals is supplied to a filtration  
25 unit 26 such as a belt filter, and the filtrate 27 (which  
is primarily caustic soda and sodium aluminate in  
solution) can be returned to the process stream used for  
dissolving bauxite. The filter cake 28 is primarily  
sodium oxalate and sodium carbonate, and possibly other  
30 salts; it can then be removed for disposal or processing.

Thus in use, crystal nuclei are formed as the liquor  
16 flows through the treatment module 52; and these  
nuclei grow as a consequence of the increased  
35 supersaturation caused by the further cooling in the heat  
exchanger 54.



In the flow diagram of figure 2 the entire stream of liquor 16 is subjected to ultrasound in the treatment module 52. In a further modification, part of the stream 5 16 may bypass the treatment module 52 as shown by the broken line 58. A further modification is to provide a pumped recirculation loop 24, this loop 24 including an ultrasonic irradiation module 32, on one or more of the hold-up tanks. As shown, one such insonation loop 24 is 10 provided on the first hold-up tank 20, and other such loops 24 may be provided on at least some of the other hold-up tanks, for example on the third hold-up tank 22. It will be appreciated that each such recirculation loop 24 that includes an ultrasonic irradiation module 32 will 15 tend to produce new seed crystals (as long as the sodium oxalate remains supersaturated), which will grow in the associated hold-up tank, so further reducing the concentration of sodium oxalate in solution. The following hold-up tanks, 21 and 23 respectively, provide 20 for crystal growth from the nuclei that have been initiated. And in a further alternative, additional ultrasonic irradiation modules 52 can also be placed in-line rather than in a recirculation loop, i.e. between one hold-up tank and the next.



Claims

1. A method for removing sodium oxalate from a Bayer liquor, the method comprising removing a stream of the  
5 liquor, treating it to be supersaturated with sodium oxalate, and then subjecting it to ultrasonic irradiation, and removing resultant crystals.
2. A method as claimed in claim 1 wherein the stream of  
10 the supersaturated liquor is subjected to ultrasonic irradiation for a time no more than 30 seconds, more preferably no more than 10 seconds, for example 2 seconds or 3 seconds.
- 15 3. A method as claimed in claim 2 wherein the stream is caused to flow through a duct, and the contents of the duct are continuously subjected to ultrasonic irradiation.
- 20 4. A method as claimed in claim 3 wherein the ultrasound is applied using a multiplicity of ultrasonic transducers attached to a wall of the duct in an array of separate transducers extending both circumferentially and  
25 longitudinally, each transducer being connected to a signal generator so that the transducer radiates no more than  $3 \text{ W/cm}^2$ , the transducers being sufficiently close together and the number of transducers being sufficiently high that the power dissipation within the vessel is between 25 and 150 W/litre.  
30
5. A method as claimed in claim 4 wherein the duct is of width at least 0.10 m.
6. A method as claimed in any one of the preceding  
35 claims wherein the Bayer liquor is first treated by



evaporation so that it becomes supersaturated with sodium oxalate.

7. A method as claimed in any one of the preceding  
5 claims wherein the crystals resulting from ultrasonic irradiation are contacted with liquor that is supersaturated with sodium oxalate so the crystals grow, before removing resultant crystals.

10 8. An apparatus for removing sodium oxalate from a Bayer liquor, the apparatus comprising means to make a stream of the liquor supersaturated with sodium oxalate, means to subject supersaturated liquor to ultrasonic irradiation, and means to remove the resultant crystals.

15 9. An apparatus as claimed in claim 8 wherein the ultrasonic irradiation means comprises a duct with a multiplicity of ultrasonic transducers attached to a wall of the duct in an array of separate transducers extending  
20 both circumferentially and longitudinally, each transducer being connected to a signal generator arranged such that the transducer radiates no more than  $3 \text{ W/cm}^2$ , the number and the proximity of the transducers being sufficient that the power dissipation within the vessel  
25 in use is between 25 and 150 W/litre.

10. An apparatus as claimed in claim 8 or claim 9 also comprising a vessel in which supersaturated liquor is combined with the liquor that has been subjected to  
30 ultrasonic irradiation, before removal of any resultant crystals.

11. A method for removing sodium oxalate from a Bayer liquor substantially as hereinbefore described with  
35 reference to, and as shown in, figure 1 or figure 2 of the accompanying drawings.



12. An apparatus for removing sodium oxalate from a  
Bayer liquor substantially as hereinbefore described with  
reference to, and as shown in, figure 1 or figure 2 of  
5 the accompanying drawings.

15819 MdH

P T Mansfield  
Chartered Patent Agent  
Agent for the Applicant

10



Abstract

Removal of Sodium Oxalate from a Bayer Liquor

- 5        The Bayer process uses hot sodium hydroxide solution to obtain pure alumina from bauxite ore. Alumina dissolves, and is then precipitated, and the remaining caustic Bayer liquor can be recycled for use again. However sodium oxalate tends to build up in the recycled
- 10    liquor, and causes problems. By removing a stream of the liquor, treating it so as to be supersaturated with sodium oxalate, and then subjecting it to ultrasonic irradiation, crystal nuclei are formed. The resultant crystals can then be separated from the liquor.
- 15    Surprisingly, other organic compounds in solution do not prevent this crystallisation process from being effective. (Figure 1)



Fig. 1


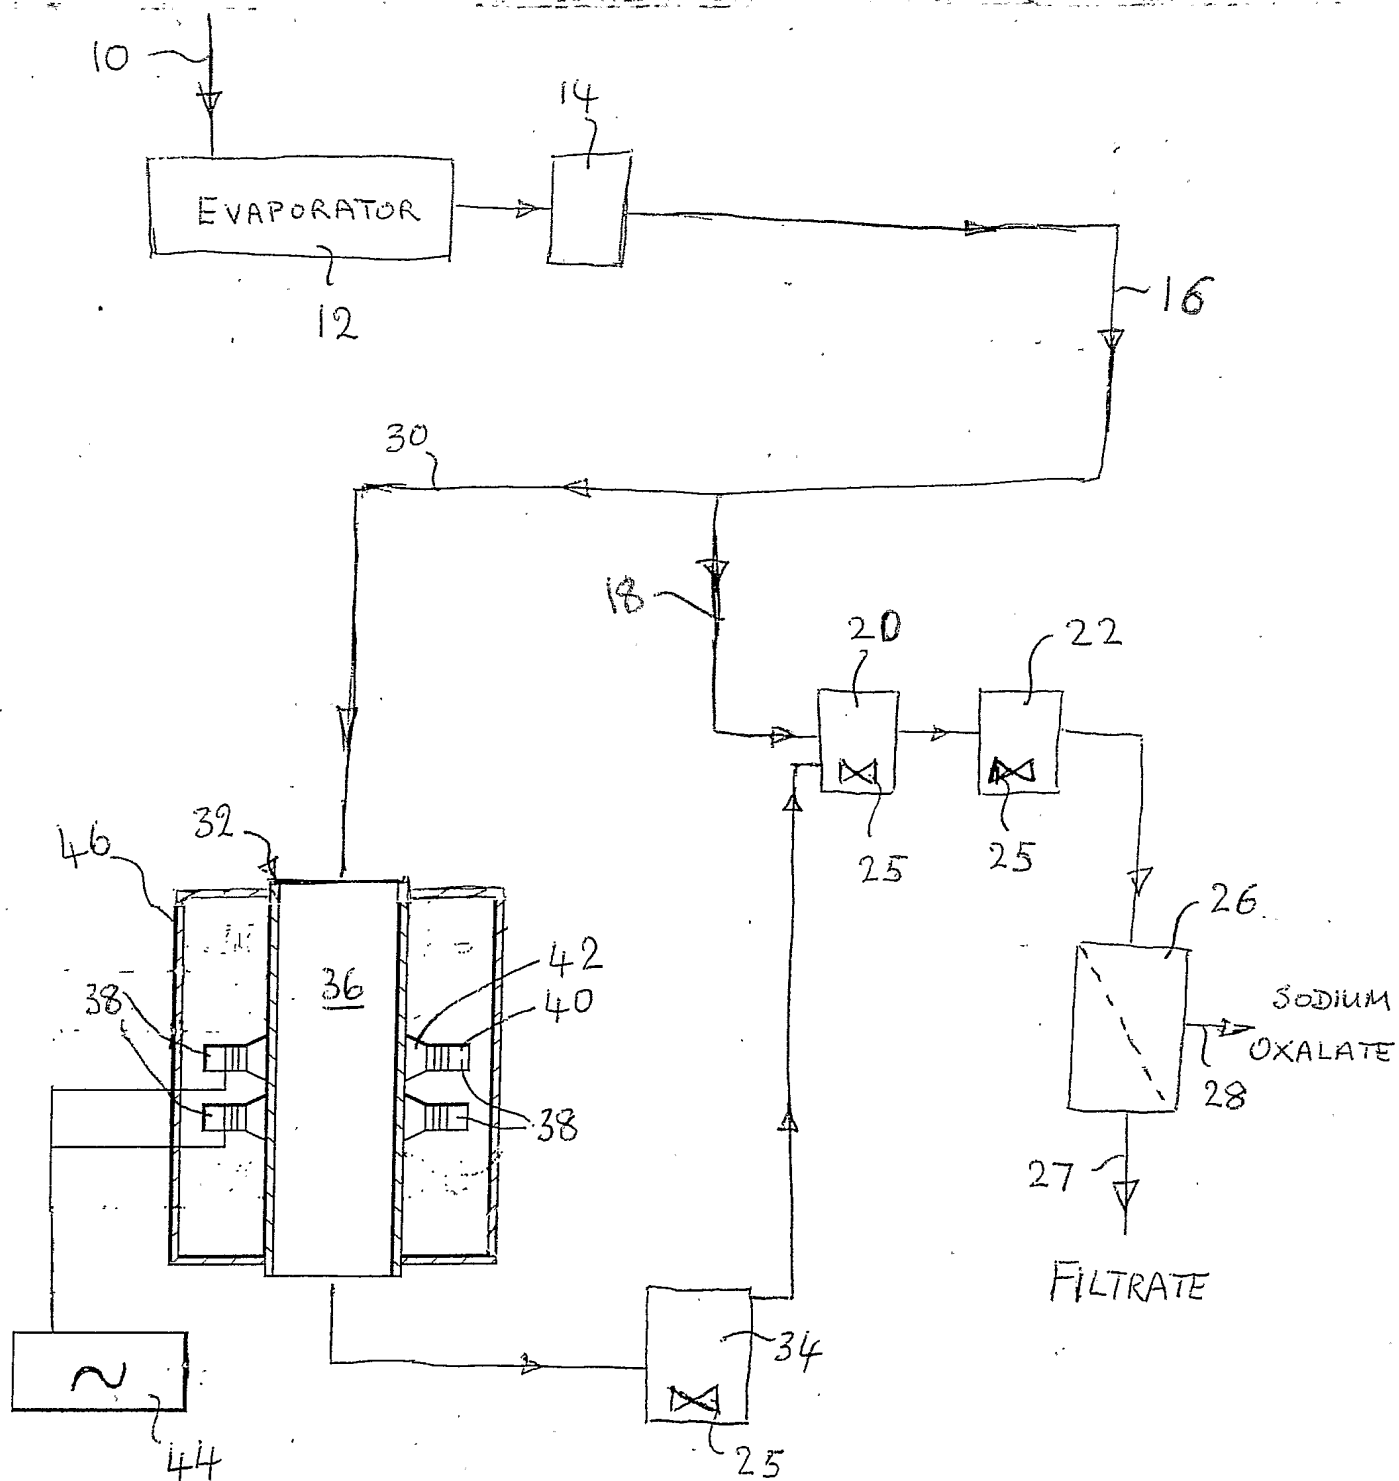




Fig. 2



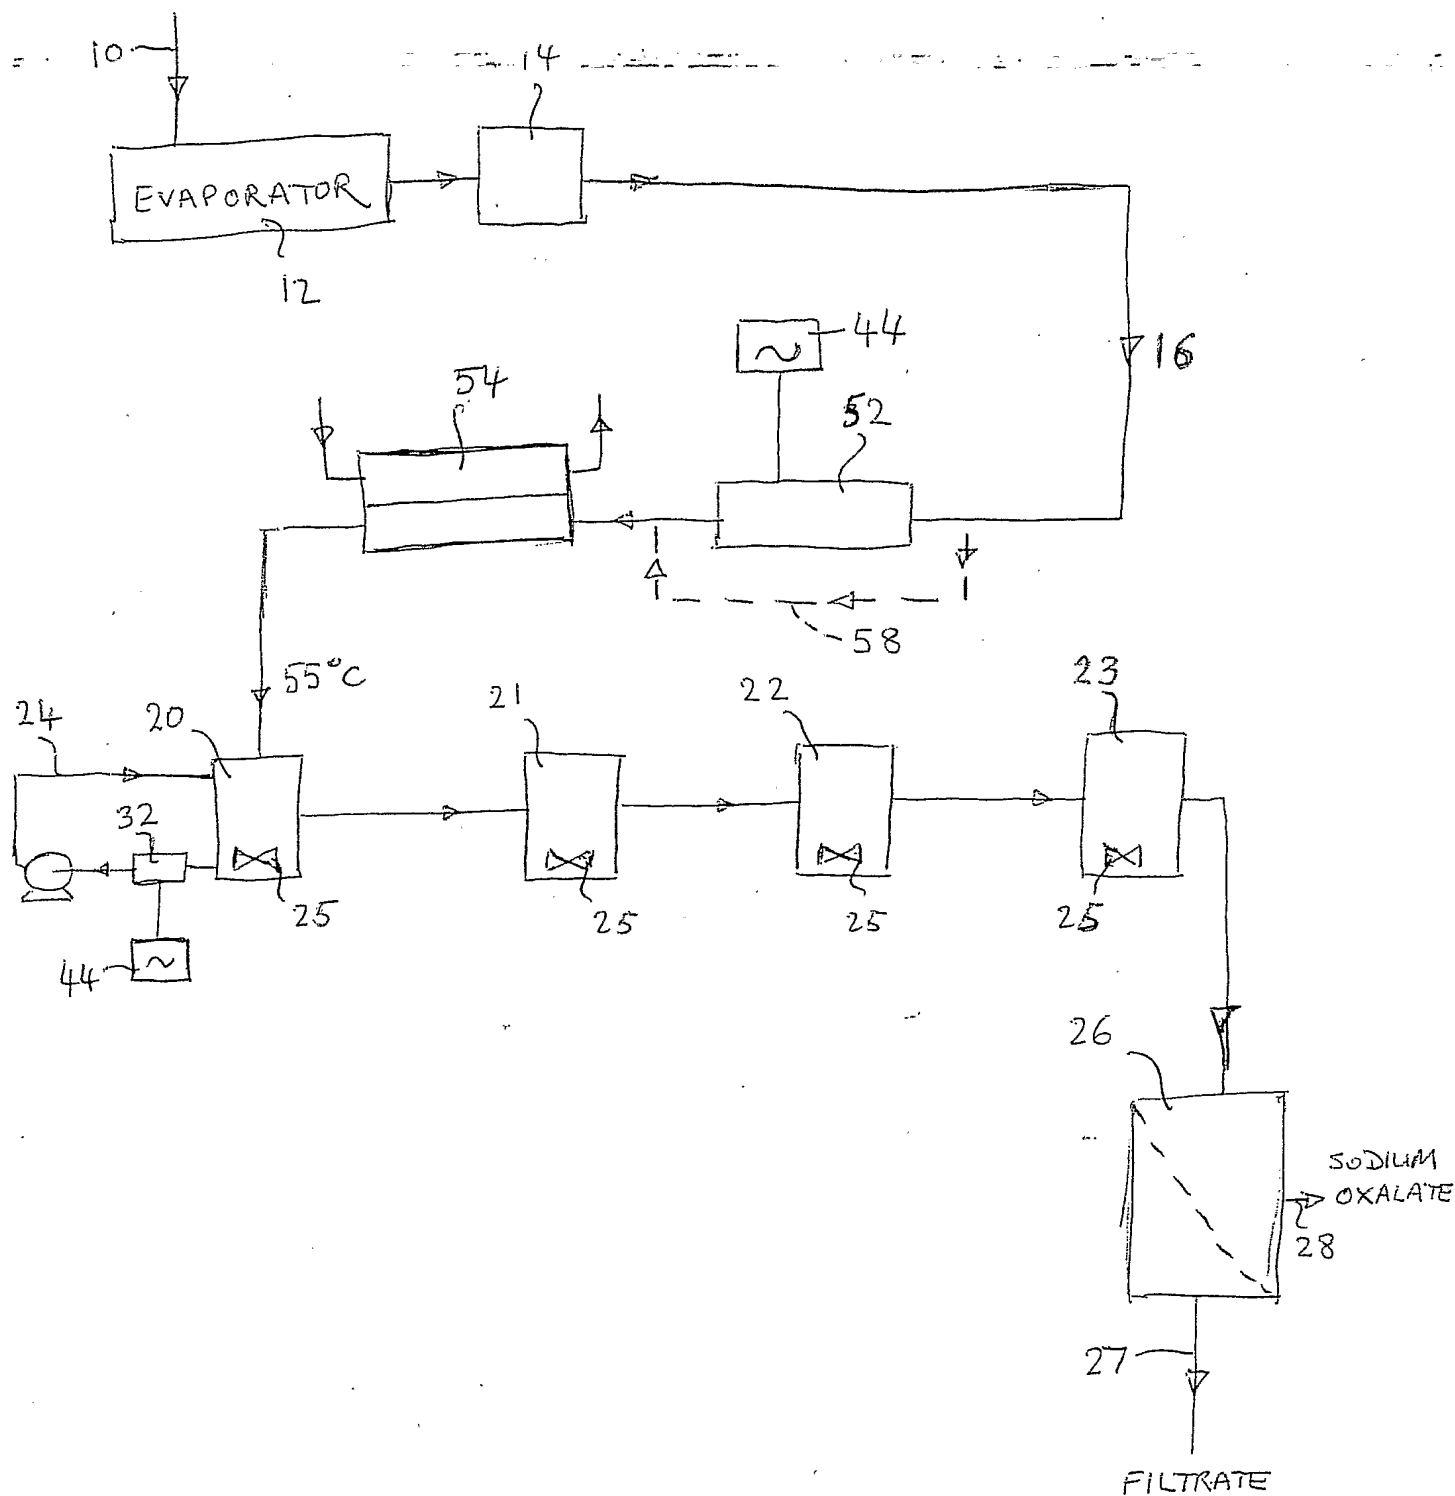

DC

PCT/GB05/000812

THE PATENT OFFICE

31 MAR 2005

Received in Patents  
International Unit